

HOSE REELS

REELS CONTRIBUTE TO AN IMPROVED WORK ENVIRONMENT WHICH SAVES TIME, EQUIPMENT & MONEY

Standard features Include:

- Durable, corrosion-resistant powder coat paint
- Heavy-duty, reinforced steel stampings for increased strength
- Permanently lubricated for long, trouble-free service
- Multi-position guide arms for versatile mounting options
- Kinkless, high quality hoses
- Spring rewind features long life spring with declutching arbor



FH494



FH502



FH504



HEAVY-DUTY INDUSTRIAL STEEL REELS

Model No.	Mfg. No.	Drive Type	Hose I.D."	Hose Length'	Max PSI	Hose Outlet (M)NPT"	Reel Inlet (F)NPT"	Reel Outlet (F)NPT"	W"	Dimensions x D" x H"	Wt. lbs.	Price /Each
AIR or WATER reels for manufacturing plants, body shops, workshops, service stations, fabricators, spray booths - sold with hose												
TN315	4435-OLP	Spring	1/4	35	300	1/4	3/8	-	5 5/8	x 12 3/8 x 12 7/8	19	
TN317	4625-OLP	Spring	3/8	25	300	1/4	3/8	-	5 5/8	x 12 3/8 x 12 7/8	20	
TN316	5635-OLP	Spring	3/8	35	300	1/4	3/8	-	6 1/8	x 14 x 14 3/8	25	
TN318	7650-OLP	Spring	3/8	50	300	1/4	1/2	-	7	x 19 3/4 x 20 1/4	43	
TN319	7850-OLP	Spring	1/2	50	300	3/8	1/2	-	7	x 19 3/4 x 20 1/4	47	
FI058	5450-OLP	Spring	1/4	50	300	1/4	3/8	-	6 1/8	x 14 x 14 3/8	26	
NN152	5650-OLP	Spring	3/8	50	300	1/4	3/8	-	5 7/8	x 16 1/2 x 17 5/8	36	
FH534	81100-OLP	Spring	3/8	100	300	3/8	1/2	-	10 1/2	x 24 x 25 3/8	82	
FH490	82100-OLP	Spring	1/2	100	300	1/2	1/2	-	10 1/2	x 24 x 25 3/8	95	
FH491	83050-OLP	Spring	3/4	50	250	3/4	3/4	-	10 1/2	x 24 x 25 3/8	88	
FH492	D83075-OLP	Spring	3/4	75	250	3/4	3/4	-	13	x 24 x 25 3/8	102	
FH493	D84050-OLP	Spring	1	50	250	3/4	1	-	15 3/4	x 24 x 25 3/8	103	
FH494	E9350-OLP	Spring	3/4	50	250	3/4	3/4	-	16 3/4	x 26 1/4 x 26 3/8	140	
FH495	E9450-OLP	Spring	1	50	250	3/4	1	-	16 3/4	x 26 1/4 x 26 3/8	157	
OIL - medium pressure - furnished standard with S.A.E. 100 R1T one wire braid hose - sold with hose												
TN323	7850-OMP	Spring	1/2	50	3250	1/2	1/2	-	7	x 19 3/4 x 20 1/4	57	
GREASE or HYDRAULIC OIL- high pressure reel - furnished standard with S.A.E. 100 R2T two wire braid hose - sold with hose												
TN325	7650-OHP	Spring	3/8	50	4800	1/4	1/2	-	7	x 19 3/4 x 20 1/4	60	
WASHDOWN - high pressure reel with maximum product delivery - equipment cleaning, pressure washing - sold without hose												
FI059	PW7600-OHP	Spring	3/8	50	5000	-	1/2	3/8	7	x 19 3/4 x 20 1/4	43	
FH496	PW81000-OHP	Spring	3/8	100	5000	-	1/2	1/2	10 1/2	x 24 x 25 3/8	86	
DUAL HYDRAULIC - medium pressure reel ideal for operating hydraulic cylinders, tools and equipment - sold with hose												
FH497	TH88050-OMP	Spring	1/2	50	2000	1/2	1/2	-	13	x 24 x 25 3/8	114	
FUEL DELIVERY - low pressure equipped with Viton® seals & fuel grade hose for mobile & permanent mount applications - sold with hose												
FH498	F7925-OLP	Spring	3/4	25	250	3/4	3/4	-	7	x 19 3/4 x 20 1/4	47	
FH499	F83050-OLP	Spring	3/4	50	250	3/4	3/4	-	10 1/2	x 24 x 25 3/8	89	
FH500	FD84050-OLP	Spring	1	50	250	1	1	-	15 3/4	x 24 x 25 3/8	120	
WELDING REELS - used for a wide variety of gases such as acetylene, Mapp gas, propane gas, natural gas and fuel gases - sold with hose												
FH501	TW7450-OLPT	Spring	1/4	50	200	note 1	1/4	-	7 3/8	x 19 3/4 x 20 1/4	50	
FH502	TW84100-OLPT	Spring	1/4	100	200	note 1	note 2	-	13	x 24 x 25 3/8	101	
STAINLESS STEEL for AIR, WATER or OIL - corrosion-resistant reels - swivels include Viton® O-rings - sold without hose												
FH503	5600-OLS	Spring	3/8	35	500	-	3/8	3/8	6 1/8	x 14 x 14 3/8	22	
FH504	7800-OLS	Spring	1/2	50	500	-	1/2	1/2	7	x 19 3/4 x 20 1/4	41	
FH505	7800-OMS	Spring	1/2	50	3000	-	1/2	1/2	7	x 19 3/4 x 20 1/4	45	
HAND CRANK for AIR or WATER - designed for medium-duty applications requiring longer lengths of hose - sold without hose												
FH506	CA32106L	Manual	1/2	100	1000	-	1/2	1/2	19 3/4	x 17 3/4 x 20 1/4	40	
FH507	CA32112L	Manual	1/2	200	1000	-	1/2	1/2	25 3/4	x 17 3/4 x 20 1/4	46	
FH508	CA33112L	Manual	3/4	100	1000	-	3/4	3/4	19 3/4	x 17 3/4 x 20 1/4	46	
FI060	CB37118L	Manual	1	100	300	-	1	note 3	34	x 17 3/4 x 20 1/4	52	
HOSE REEL CART FOR 12" HAND CRANK REELS - 8" semi-pneumatic rubber tires, adjustable handle, rugged 1" square tubular steel frame												
FH509	600741-2	-	-	-	-	-	-	-	23 3/4	x 27 x 44 1/2	-	

2-Year Limited Warranty - Note 1: 9/16" - 18 UNF Female Note 2: 9/16" - 18 UNF Male Note 3: 1" NPTM
 Note 4: Handle height adjustable to 35 5/8", 38 5/8", 41 1/2", 44 1/2" Standard colour as shown - powder coat paint red



TN315



TN318




FH509

HOSE REELS

- Heavy-duty, reinforced steel stampings for increased strength
- For use with air and water
- Compact design allows reels to fit in tight locations
- Multi-position guide arms for multiple mounting options

- Kinkless, oil resistant high quality hose
- Spring rewind features long life spring with declutching arbor
- Durable, corrosion-resistant powder coat paint
- Hose Material: EPDM Rubber

Model No.	Drive Type	Hose I.D."	Hose Length'	Max PSI	Hose Outlet (M) NPT"	Reel Inlet (F) NPT"	Dimensions W" x D" x H"	Wt. lbs.	Price /Each
TLZ482	Spring	1/4	35	300	1/4	3/8	6 x 15 1/2 x 14	26.6	
TLZ483	Spring	3/8	25	300	1/4	3/8	6 x 15 1/8 x 13 7/8	26.2	
TLZ484	Spring	3/8	35	300	1/4	3/8	6 5/8 x 17 1/2 x 16 1/2	34.7	
TLZ485	Spring	3/8	50	300	1/4	3/8	6 1/2 x 20 x 18 3/8	40.3	
TLZ486	Spring	1/2	50	300	1/2	1/2	6 5/8 x 20 1/4 x 17 7/8	44.3	

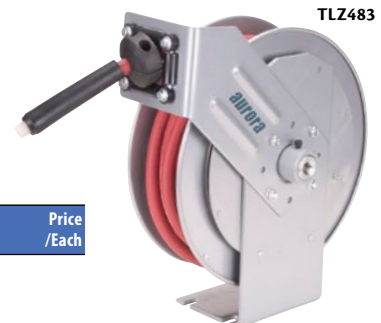

TLZ483

aurora tools